


*The minimum width measured between the lines shall be 6' or crosswalk width shall match adjacent sidewalk or path width, whichever is greater.

Note:

1. Center crosswalk on ramp.
2. Crosswalk to be paint or tape, per plans.

STANDARD CROSSWALK WITH RAMPS

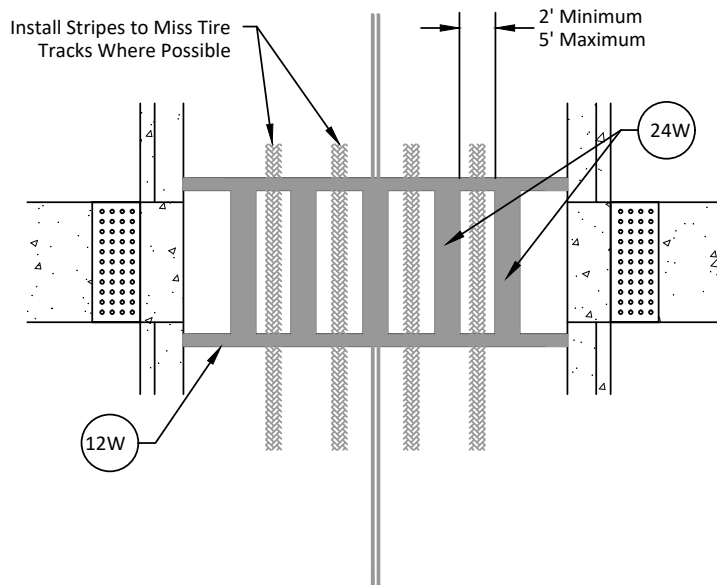

HIGH VISIBILITY CROSSWALK

N.T.S.

CITY OF RAPID CITY

PUBLIC WORKS DEPARTMENT

CROSSWALK

DATE: 8-19-22

Sec. - Sht.
91-1